

Advanced Dewatering Device

The Reflex Suction Strainer is designed to work in harsh, heavy duty, high traffic environments and provide contaminant reduced, long lasting, fast and reliable fluid transfer.


Key Features:

Improved productivity through:

- > Reduced system downtime
- > Longer lasting
- > Fewer pump blockages
- > Decreased pump dry suction time
- > Less manual handling
- > Easy cleaning
- > Fast attachment and replacement
- > No additional fittings required
- > No need to bore drainage holes

Improved safety through:


- > No sharp edges
- > Reduced trip hazards
- > No metal parts
- > Lightweight
- > Hi Vis colour

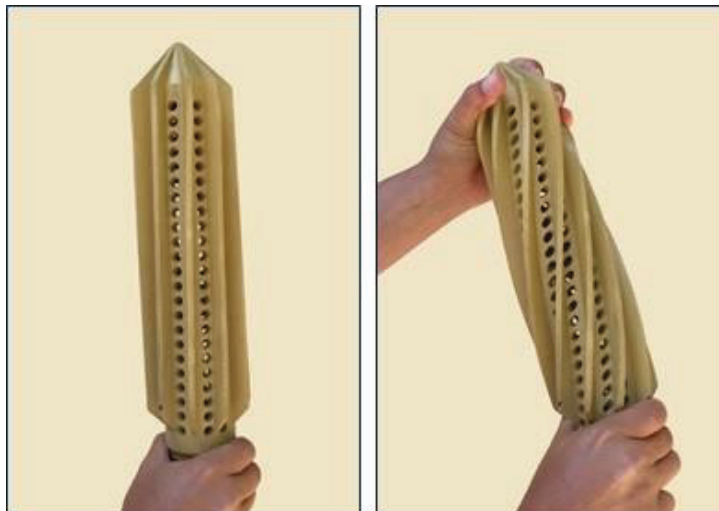

REFLEX Strainer

Flow rate	850 litres per minute
Filtration flow	Statistics 12 times surface area to suction aperture
Elongation	Safe capability 450%
Length	370mm
Width	63mm
Weight	approx. 450g
Hardness	65 shore A
Temperature range	Safe-66c to 100+c
Colour	Yellow (other colours on request)
Size	2" standard other sizes available on request.


- Vulcanized elastomeric compound(SBR)
- Manufactured in accordance to ISO9000
- Supports in excess of 100 tonnes of downward pressure
- Petrochemical resistant
- No sharp edges
- No metal parts
- No corrosion

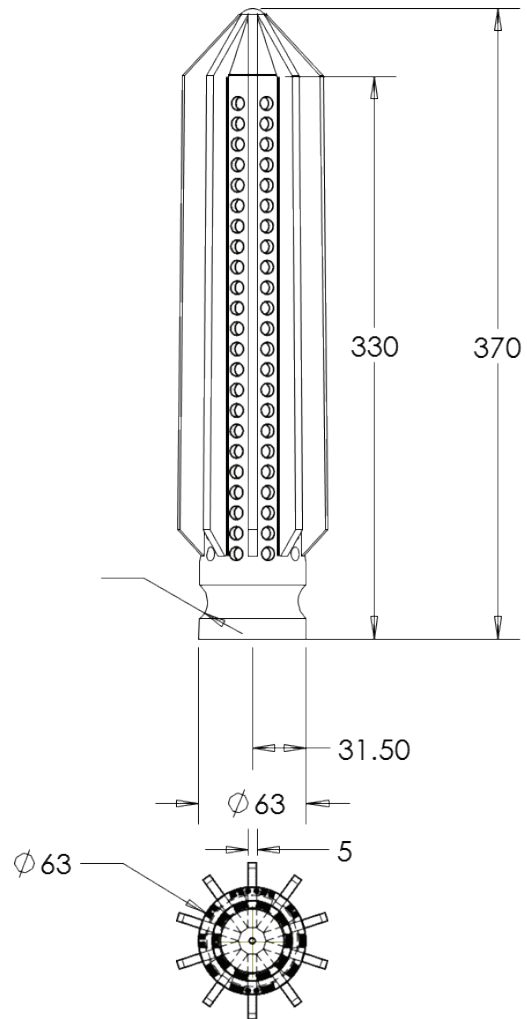

Fast attachment /
detachment to
Camlock fitting.



Reflex adapter is
chemically bonded
to the strainer.
Just slide the hose
over the male end.
No hose clamps
needed.

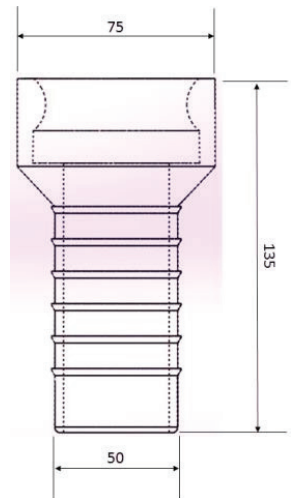

www.pumps2000america.com

