



First choice when
quality counts.™

Husky™ 3275

Air-Operated Double Diaphragm Pump

- Bolted leak-free flanged connections - no clamp bands used!
- Large flow paths that can handle high viscosities
- Easy air valve maintenance
- Heavy-duty construction
- Fluid flow up to 275 gpm (1040 lpm)

**The most
reliable and
easy-to-service
3 in. (76 mm)
pump on the
market today!**



The Husky 3275 is the biggest pump in Graco's double diaphragm lineup. Its larger size enables it to deliver over 275 gallons (1041 liters) per minute.


The lube-free Husky 3275 pump was engineered with the chemical, petrochemical, paper and mining industries in mind. It boasts the most reliable and trouble-free air switching valve in the world. The innovative design of the air switching valve prevents shut-down and air valve hang-up problems and can be serviced without disassembling the pump.

The pump's heavy-duty construction make it ideal for handling the most difficult chemical transfer, filter press feed, and dewatering applications.

Technical Specifications

Maximum fluid working pressure	120 psi (0.84 MPa, 8.4 bar)
Air operating range	20-120 psi (0.14-0.84 MPa, 1.4-8.4 bar)
Maximum air consumption	325 scfm
Air consumption	
at 70 psi (480 kPa, 4.7 bar) / 100 gpm (379 lpm)	120 scfm (1.26 m ³ /min)
Maximum free flow delivery	275 gpm (1,041 lpm)
Maximum pump speed	135 cpm
Gallons (liters) per cycle	2.0 (7.6)
Maximum suction lift (water)	
Dry	8 ft. (2.4 m)
Wet	25 ft. (7.6 m)
Maximum size pumpable solids	3/8 in. (9.4 mm)
Air inlet	3/4 npt(f)
Maximum operating temperature	150°F (65°C)
Fluid inlet	3 in. ANSI 4 bolt flange / DIN 8-bolt flange
Fluid outlet	3 in. ANSI 4 bolt flange / DIN 8-bolt flange
Wetted parts	aluminum, Teflon, Santoprene, Hytrel, plated steel, acetal, SST
Weight	150 lbs. (68 kg)
Instruction manual	308639

Performance Chart – Husky 3275

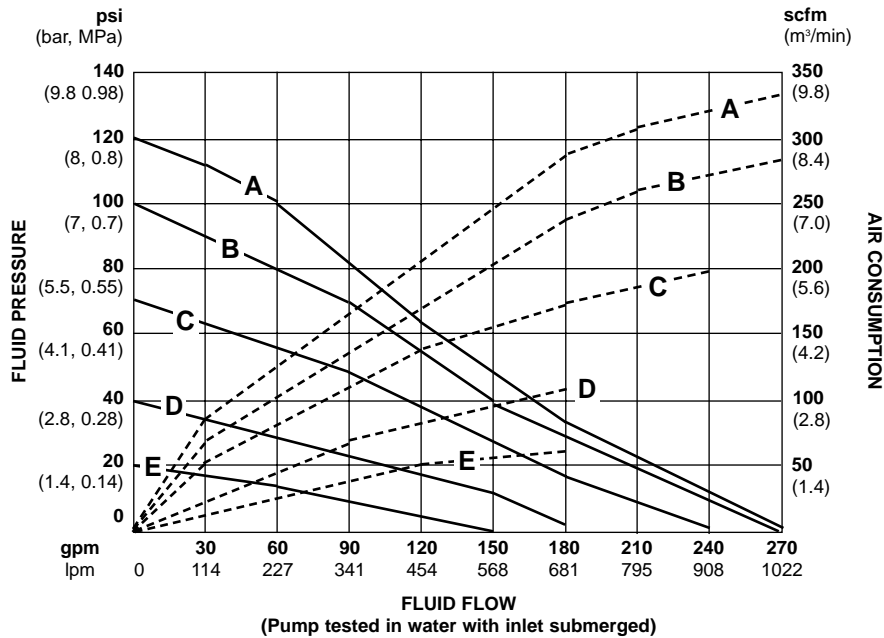

Key to Varying Air Pressures

- A** at 120 psi (8 bar, 0.8 MPa)
- B** at 100 psi (7 bar, 0.7 MPa)
- C** at 70 psi (4.8 bar, 0.48 MPa)
- D** at 40 psi (2.8 bar, 0.28 MPa)
- E** at 20 psi (1.4 bar, 0.14 MPa)

Accessories

110197 Quick-Connect (3/4) Air Supply Nipple
 Max. working pressure: 300 psi (2.1 MPa, 21 bar).
 Inlet/outlet: 3/4 npt(f). Steel.

110200 Quick-Connect (3/4) Air Supply Coupler
 Max. working pressure: 300 psi (2.1 MPa, 21 bar).
 Inlet/outlet: 3/4 npt(f). Brass.

107141 Air Shut-Off Valve Bleed
 Inlet/outlet: 3/4 npt(mxf). Bronze.

224040 Air Guard Runaway Valve
 Max. working pressure: 120 psi (0.83 MPa, 8.3 bar).
 Max. cfm @ 100 psi (0.7 MPa, 7 bar): 250 scfm.
 Inlet/outlet: 3/4 npt(f). Aluminum alloy.

238881 Integrated FR Assembly
 Max. working pressure: 120 psi (0.83 MPa, 8.3 bar).
 Inlet/outlet: 3/4 npt(f). Zinc.

237569 Grounding Wire and Clamp
 Length: 25 ft. (7.6 m). 12 ga. (1.5 mm²).

180187 High Volume Air Regulator
 Max. working pressure: 300 psi (2.1 MPa, 21 bar).
 Max. cfm @ 100 psi (0.7 MPa, 7 bar): 380 scfm.
 Quick-disconnect: 1/4 in. gauge ports.
 Inlet/outlet: 3/4 npt(f).


106150 Air Filter
 Max. working pressure: 250 psi (1.72 MPa, 17.2 bar).
 Max. cfm @ 100 psi (0.7 MPa, 7 bar): 260 scfm.
 Inlet/outlet: 3/4 npt(fbe). Zinc plated.

Adapter Flange Kits
 Inlet/outlet: ANSI to npt.
239392 Stainless steel
239391 Carbon steel

207675 Air Manifold 90°
 Inlet/outlet: 3/4 npt(f) x 3/4 npt(m).
 Quick-disconnect: 1/4 npt(f) and 1/8 npt(f) port.
 Carbon steel.

238765 Air Valve Repair Kit

Dimension Drawings - Heavy-Duty Series

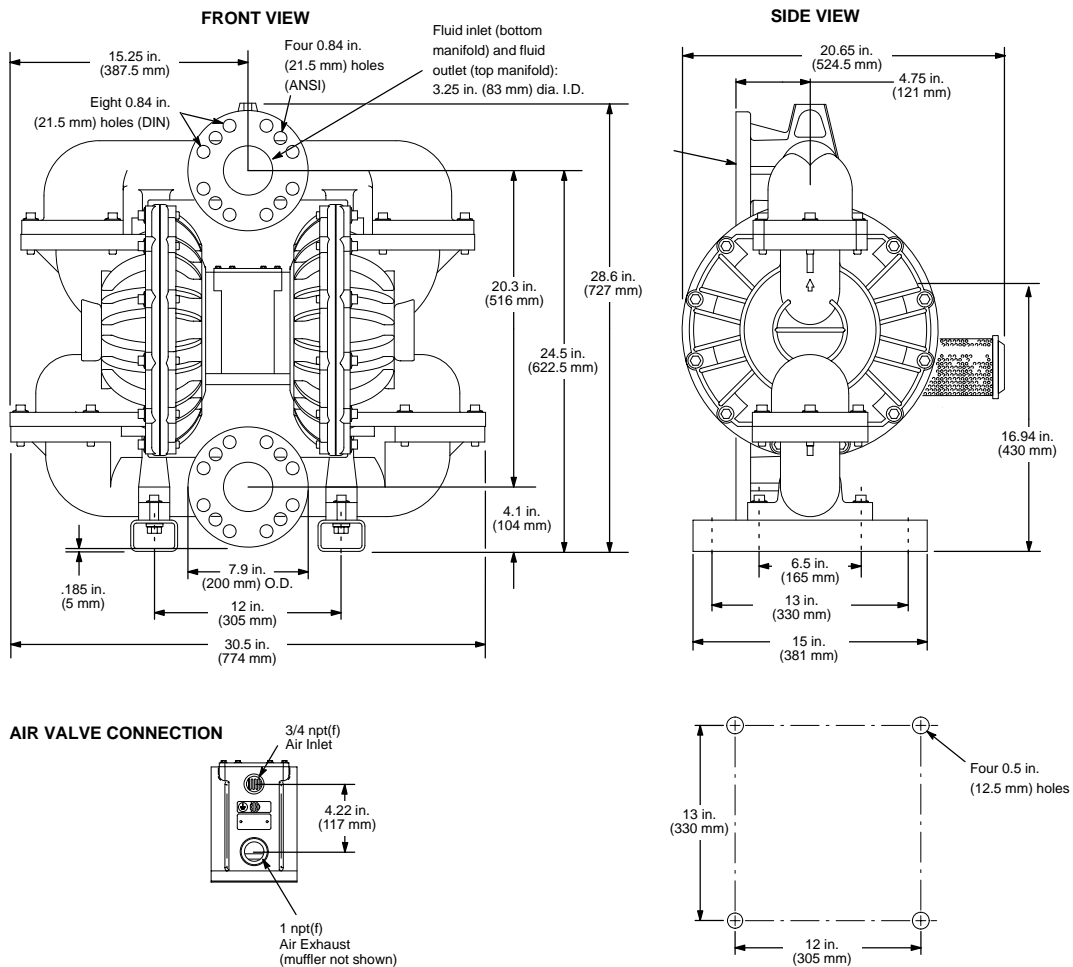

Ordering Information for the Husky 3275

To determine the model number of your pump from the following matrix, select the six digits which describe your pump-of-choice, working from left to right. The first digit is always "D," designating Husky diaphragm pumps. The remaining five digits define the materials of construction. Example: a pump with an aluminum air motor and fluid section, stainless steel seats, Santoprene balls, and Santoprene diaphragms is Model DK3366.

Part No.	Seats	Balls	Diaphragms	Service Kits
Aluminum Models				
DK3311	SST	Teflon	Teflon	D0K311
DK3316	SST	Teflon	Santoprene	D0K316
DK3366	SST	Santoprene	Santoprene	D0K366
DK3515	Hytrel	Teflon	Hytrel	D0K515
DK3525	Hytrel	Acetal	Hytrel	D0K525
DK3565	Hytrel	Santoprene	Hytrel	D0K565
DK3611	Santoprene	Teflon	Teflon	D0K611
DK3616	Santoprene	Teflon	Santoprene	D0K616
DK3666	Santoprene	Santoprene	Santoprene	D0K666

Sales/Distribution

North America Toll Free 877-84-GRACO (877-844-7226)
 Telephone 612-623-6743
 Fax 612-623-6580
 www.graco.com

Locate authorized North American distributors
 Product information literature



GRACO INC.
 P.O. Box 1441
 Minneapolis, MN 55440-1441



Graco Inc. is registered to I.S. EN ISO 9001.

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

