

MASTERFLEX® I/P® air-powered pumps

- Deliver flow rates from 0.12 to 17 LPM (0.03 to 4.5 GPM)
- Ideal for hazardous-duty locations
- No electric power required—use where electricity is unsafe or impractical
- Intrinsically safe when properly grounded
- Wide flow control range (10:1 turndown)
- Compact, portable console package
- Reversible motor allows pumping in either direction or purging when changing tubing
- Powerful, yet cool operation
- Smooth-starting, low-maintenance motor



Air-powered pump 960-1020 includes a High-Performance pump head




Air-powered drive 950-1020 includes an Easy-Load® pump head



GO to page 27

Flow ranges and ordering information for air-powered pumps is on page 27.

Flow Curves
I/P® Easy-Load® Pump

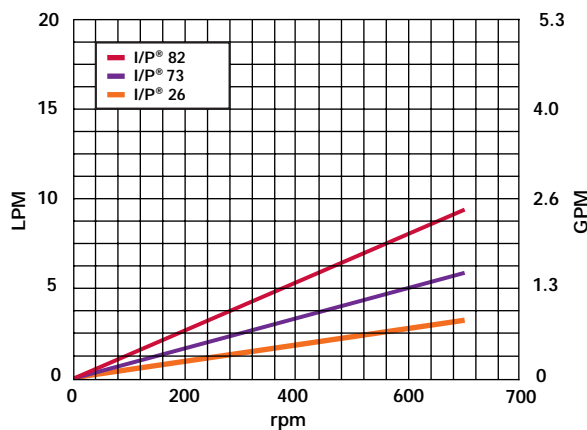

Flow Curves
I/P® High-Performance Pump

