Available on wheels (shown), skid or trailer

2” & 3” Diaphragm Pumps

Without Power

Backed By CH&E
Limited Warranty

Models and Specifications

Pump	5430	5530	6430	6530
Body	Aluminum	Aluminum	Cast Iron	Cast Iron
Suction & Discharge	2 inch	3 inch	2 inch	3 inch
Max. Suction Lift (ft.)	25	25	25	25
Max Discharge Head (ft.)	25	25	25	25
Shipping Dimensions (L x W x H in.):				
Skid	39 x 25 x 23	39 x 30 x 23	39 x 25 x 23	39 x 30 x 23
Cage	35 x 23 x 27	35 x 23 x 27	35 x 23 x 27	35 x 23 x 27
Wheels	40 x 25 x 23	40 x 30 x 24	40 x 25 x 23	40 x 30 x 24
Shipping Weight /Net Weight (lbs.)	120/100	145/125	150/130	200/180
Notes	Pump is set up for a **3-5 HP Gas Powered Engine.**	Pump is set up for a **3-5 HP Gas Powered Engine.**	Pump is set up for a **3-5 HP Gas Powered Engine.**	Pump is set up for a **3-5 HP Gas Powered Engine.**

WARNING:
DO NOT USE IN EXPLOSIVE ATMOSPHERE OR FOR PUMPING VOLATILE, FLAMMABLE LIQUIDS

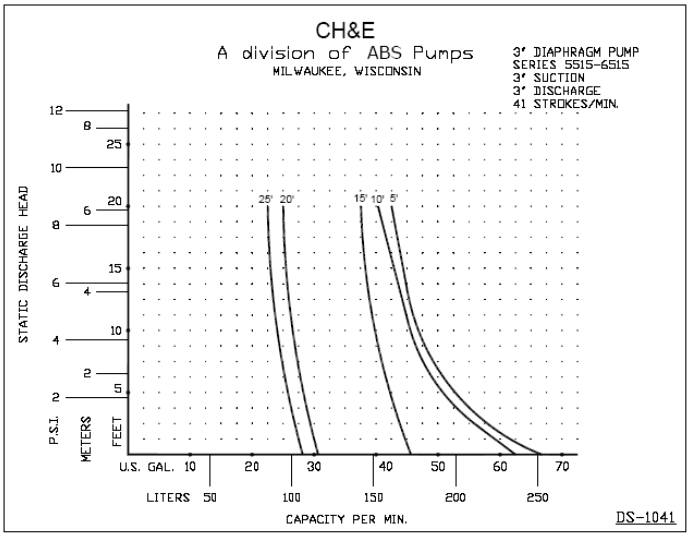

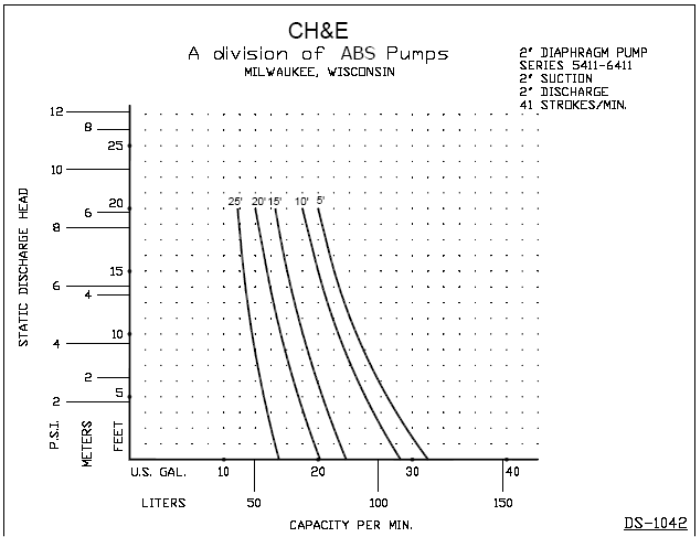

2" & 3" Diaphragm Pumps Without Power

STANDARD EQUIPMENT:

- Skid Mounting
- TPE Diaphragm
- Buna N. Flap Valves

OPTIONAL EQUIPMENT:

- Flexible Couplings
- Industrial Wheels and Handle
- Flange Connectors
- Rubber Diaphragm and Flap Valves
- Neoprene Diaphragm w/ cloth insert and Flap Valves
- Viton Diaphragm and Flap Valves
- Buna N. Diaphragm and Flap Valves
- Wheel Mounting with Handle
- Cage Mounting

MORE PRODUCTIVE PUMPING FOR:

- Seepage Dewatering
- Sandy, Muddy, Mucky Water
- High Suction Lifts
- Cleaning Septic Tanks
- Pumping Industrial Waste
- Pumping Marine Tanks
- Small Wellpoint Systems

5500 on Skid Mounting