

EB-125




Standard Service Retractable Injection Quill

3/4" Valve x 3/8" Tube with Integrated Check Valve and Quick Disconnect

SPECIFICATIONS

SAFETY RATING	150 PSI
CHECK VALVE	INTEGRATED SPRING LOADED BALL CHECK ¹
SAF-T-SEAL TIP	OPTIONAL
QUICK DISCONNECT	YES
VALVE/PROCESS CONNECTION SIZE	3/4" MNPT ²
INLET CONNECTION SIZE	1/2" MNPT
SOLUTION TUBE SIZE	3/8"
SOLUTION TUBE ID	0.423"
SOLUTION TUBE OD	0.675"
(A) OPERATING HEIGHT	14.25" - BRASS 15" - STAINLESS STEEL
(B) VALVE/GLAND LENGTH	6.5" - BRASS 7.25" - STAINLESS STEEL
EXTRACTION LENGTH	A + B + INSERTION LENGTH

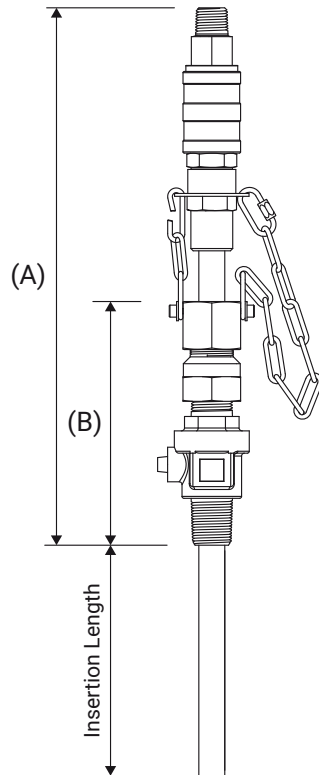

ORDERING INFORMATION

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH ³	TIP CONFIGURATION	CHECK VALVE SEAL
EB-125	-	-	-	-	-
	B = Brass S = Stainless Steel	P = PVC	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM	V = FKM E = EPDM

TECH NOTES

1. Check valve spring cracking pressure is 10 psi.
2. Main connection thread type is NPT by default. CC (AWWA) also available. Consult factory for details.
3. Maximum insertion length for 3/8" PVC solution tubes is 6". PVC solution tubes are not covered by warranty when used in process flows with velocities 6 fps or greater.