


EB-164



Standard Service Retractable Injection Quill 1" Valve x 1/2" Tube with Integrated Check Valve

SPECIFICATIONS

SAFETY RATING	150 PSI
CHECK VALVE	INTEGRATED SPRING LOADED BALL CHECK VALVE
SAF-T-SEAL TIP	OPTIONAL
QUICK DISCONNECT	NO
VALVE/PROCESS CONNECTION SIZE	1"
INLET CONNECTION SIZE	1/2"
SOLUTION TUBE SIZE	1/2"
SOLUTION TUBE ID	0.546"
SOLUTION TUBE OD	0.840"
(A) OPERATING LENGTH	14.75"
(B) VALVE/GLAND LENGTH	8"
EXTRACTION LENGTH	22.75" + INSERTION LENGTH

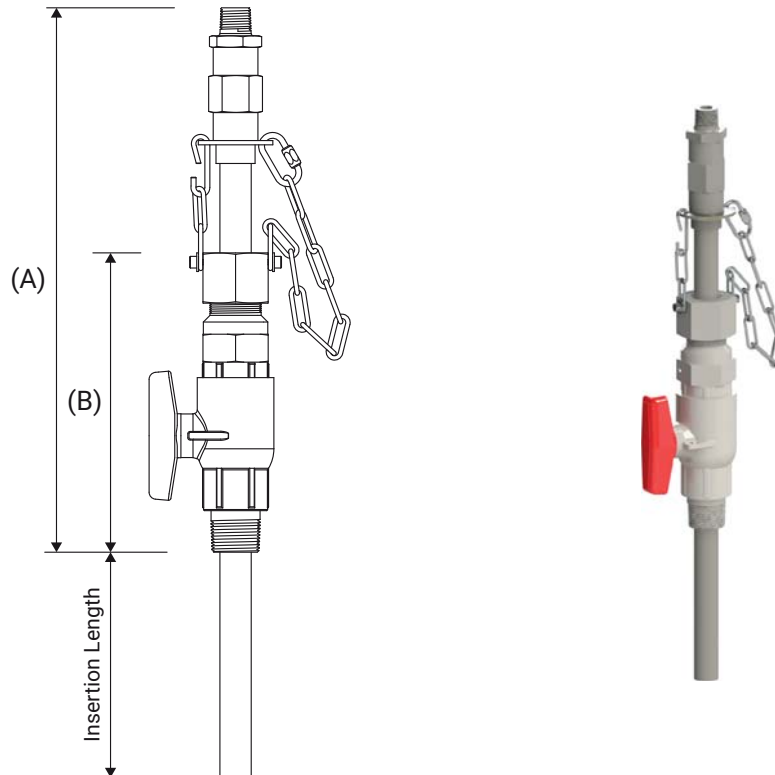

ORDERING INFORMATION

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION	CHECK VALVE SEAL
EB-164	-	-	-	-	-
	C = CPVC	P = PVC C = CPVC	All Tube Materials 2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM	V = FKM E = EPDM K = KALREZ 6375

TECH NOTES

1. Check valve spring cracking pressure is 10 PSI.
2. Maximum insertion length for 3/8" PVC and CPVC solution tubes is 6". PVC and CPVC solution tubes are not covered by warranty when used in process flows with velocities 6 fps or greater.