


# HS-075

## Heavy Service Retractable Injection Quill 3/4" Valve x 3/8" Tube



### SPECIFICATIONS

SAFETY RATING	250 PSI
CHECK VALVE	N/A
SAF-T-SEAL TIP	OPTIONAL
QUICK DISCONNECT	NO
VALVE/PROCESS CONNECTION SIZE	3/4"
INLET CONNECTION SIZE	3/8"
SOLUTION TUBE SIZE	3/8"
SOLUTION TUBE ID (W/SAF-T-SEAL)	0.423"
SOLUTION TUBE ID (W/O SAF-T-SEAL)	0.493"
SOLUTION TUBE OD	0.675"
(A) OPERATING LENGTH	10.5"
(B) VALVE/GLAND LENGTH	7.5"
EXTRACTION LENGTH	18" + INSERTION LENGTH

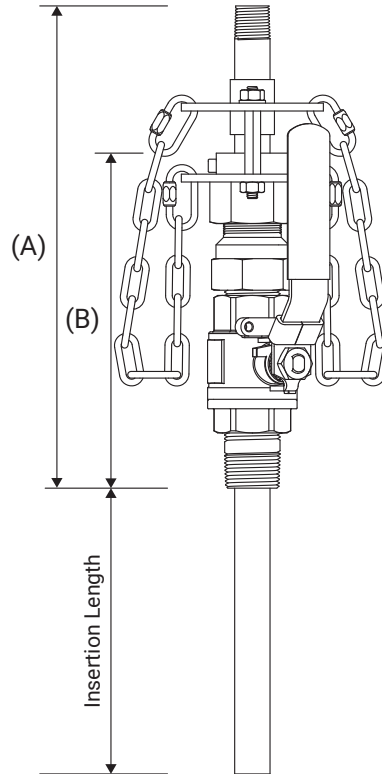

### ORDERING INFORMATION

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
HS-075	-	-	-	-
	S = Stainless Steel	A = ALLOY 20 H = HASTELLOY® C276 S = 316SS T = Titanium Gr.2	2 = 2" 4 = 4" 6 = 6" 8 = 8" 10 = 10" 12 = 12" 18 = 18" 24 = 24"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM  *SAF-T-Seal Tip not available with Titanium Solution Tubes

### TECH NOTES

1. Check valve spring cracking pressure is 10 PSI.
2. Availability of Titanium solution tube material is subject to change. Please inquire prior to selecting.
3. HS-075 series covers product options that were previously contained under non-check valve equipped versions of the EB-168 series.